

The INSTEON Hub controller connects you to your home from any smartphone, tablet or web browser.

You can then control your INSTEON home from across the room or across the world. You can even choose to receive instant event emails or text alerts.

- Control your entire INSTEON network
- Easily add and control INSTEON devices, setup scenes and run timers
- Receive event triggered emails and/or text alerts
- Award-winning INSTEON dual-mesh technology



Overview

The INSTEON Hub connects you to your home or business from any smartphone, tablet or web browser. Control INSTEON light bulbs, wall switches, outlets and thermostats. Receive instant email or text alerts from motion and door/window sensors while you're away.


Just start with the Hub, select the INSTEON devices for your home or business and enjoy.

How it works

The Hub works in combination with your router and your Apple™ or Android™ smartphones and tablets to control INSTEON devices in your home while you're there or from anywhere in the world.

The INSTEON Hub securely stores your homes configuration in the cloud, which allows access from any number of smartphones and tablets you or your family may own. Want to add another smart-phone? Simply download the app, sign in and all your settings (devices, scenes, icons, timers, etc.) are there to enjoy.

The free INSTEON for Hub app works in concert with the Hub to automatically configure your Hub and router for remote access - so simple, anyone can do it.

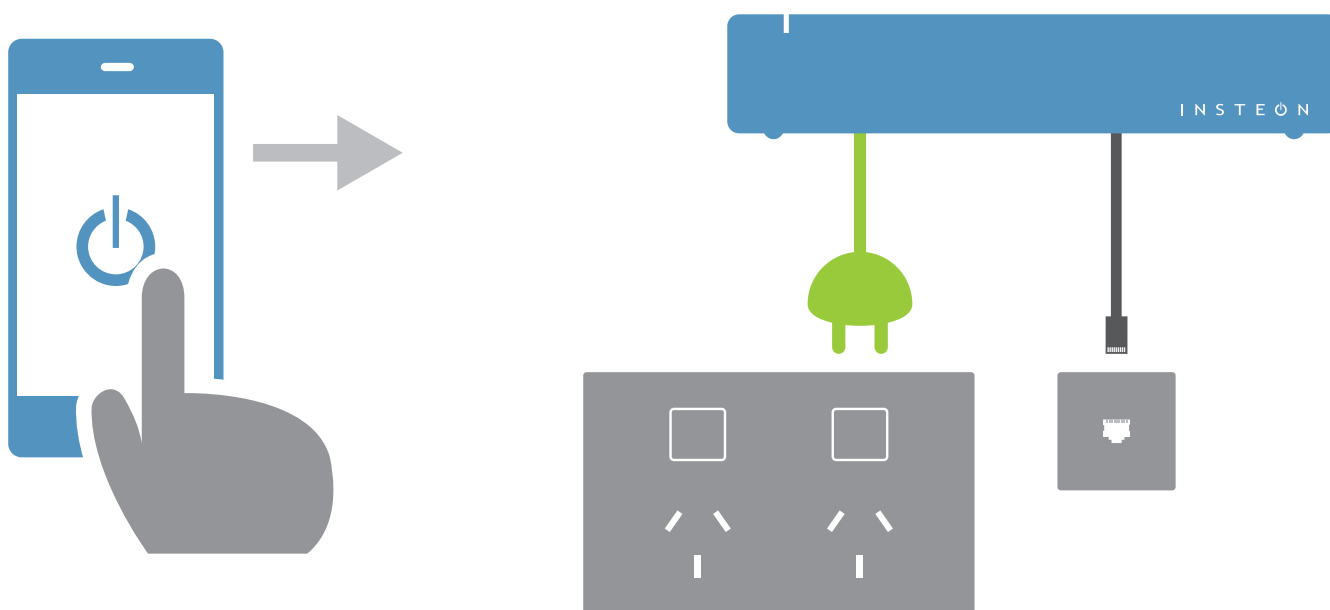

General

Product Name:	INSTEON Hub
Product Code:	2242-522
Recommended Retail Price:	\$129
In the box:	INSTEON Hub, AC cord, Ethernet cable, Quick start guide
Warranty:	2 Years

INSTEON

INSTEON Power line Mesh Repeater:	Yes
INSTEON Controller:	Yes
INSTEON Responder:	Yes
Maximum links:	2,016
Hub as Controller Scenes:	256
Commands supported as controller:	All
Commands supported as responder:	All
Software configurable:	Yes

TCP/IP Network

Network Interface:	RJ45 Ethernet (10Mbps)
DHCP:	Supported
User-Assigned IP:	Supported
Dynamic DNS:	Supported
Remote DNS Service:	Provided automatically by connect.insteon.com
Port Forwarding for Hub:	Automatically configured during setup

Mechanical

Mounting:	Table top or wall mount
Casing:	UV stabalized plastic (INSTEON White)
Set button:	Yes
Beeper:	Yes
LED:	1 RGB
Dimensions & Weight:	180mm W x 38mm H x 102mm D - 142g
Operating Conditions:	Indoors, 0° C to 40° C, up to 85% relative humidity

Electrical

Voltage:	100VAC to 240VAC ($\pm 10\%$)
Frequency:	50/60Hz auto-detected at power-up
Surge Protection:	Over 1,000 Volts
Power Plug:	2-pin Safety Shielded (Removable figure 8 power cable)
Retain all settings without power:	Yes, saved in non-volatile EEPROM
Power Consumption:	2.25W
Safety approved:	Approved for use in Australia and New Zealand